

DATA SHEET

TACKER CLIPS

Internal code: NEOCLIPS

1. DESCRIPTION AND USE

The use of the clips allows quick and easy assembly of underfloor heating systems regardless of the layout of the heating pipes (spiral coil, simple coil or double coil). Use the appropriate type of clips according to the thickness of the smooth polystyrene board.


The tool for applying clips - the Tacker device - replaces the manual assembly of underfloor heating pipes and offers increased work comfort for the installer, making the assembly job easier. The precise assembly allows any type of layout of a tube and the possibility of fixing the density of clips, while guaranteeing the reliability of the assembled pipe within the system when pouring the screed.



2. TECHNICAL CHARACTERISTICS


2.1 Technical data

- the clips are made of polypropylene,
- the clip packs are lightly welded on top
- the clips are adjusted to be used with the Tacker device

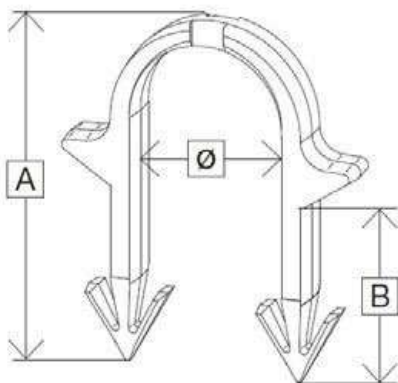

A	B	Ø max.
40	20	20

3. ASSEMBLY

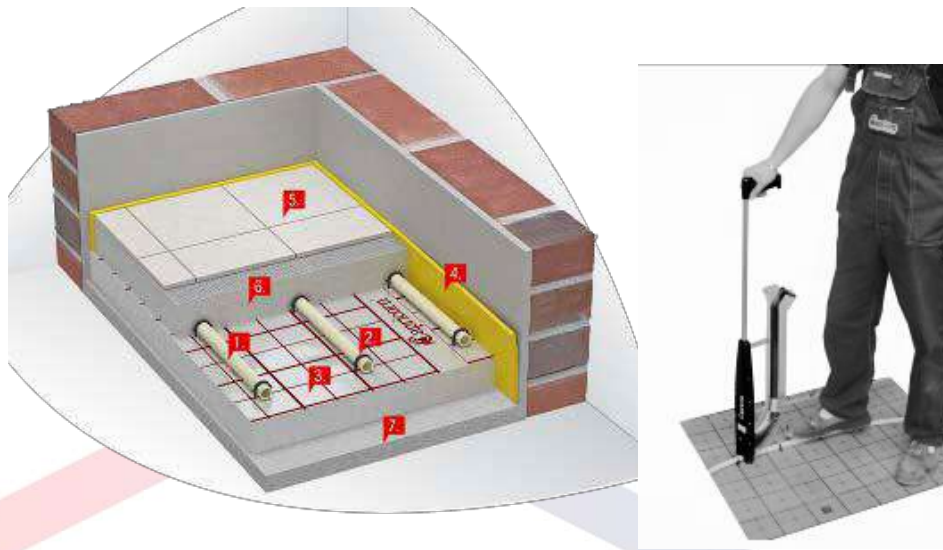

1. Heating pipe
2. Clips
3. System insulation boards
4. Perimeter band
5. Finishing layer
6. Screed
7. Concrete slab

4. BENEFITS

- material with high resistance to bending, breaking and tearing,
- the fastest and simplest method of assembling surface heating/cooling systems in the development of single-family and multi-family housing, as well as large-scale, sports and road facilities.
- it significantly reduces the time required to assemble surface heating/cooling systems,
- it increases the work comfort of the installer by using a tacker.

5. WARRANTY PERIOD

The warranty period is 24 months from the date of delivery, provided that the customer/user fully complies with the transport, handling and use rules.